

# Getting Started Guide

- [Getting Started Guide for JumpServer PoC](#)

# Getting Started Guide for JumpServer PoC

## Adding Devices

### 1. Preparation

Prepare two devices (for SSH and RDP) and one database to test the product features.

For example:


IP/Host Name	Port	Type	Account
afidc.afi.local	3389	Windows	testadmin
10.10.53.210	22	Linux	sergg
10.10.53.3	3306	MySQL	user

If you need to gather information about the **Windows** device, change local account passwords, create new accounts, or perform other tasks, you must configure **SSH for Windows**.

For RDP connections, this is **not required**.

### 2. Editing the Asset Tree

Go to the **Console - Assets - Assets** section and open the **Asset Tree** tab. Right-click in this section to open the asset tree editing menu.

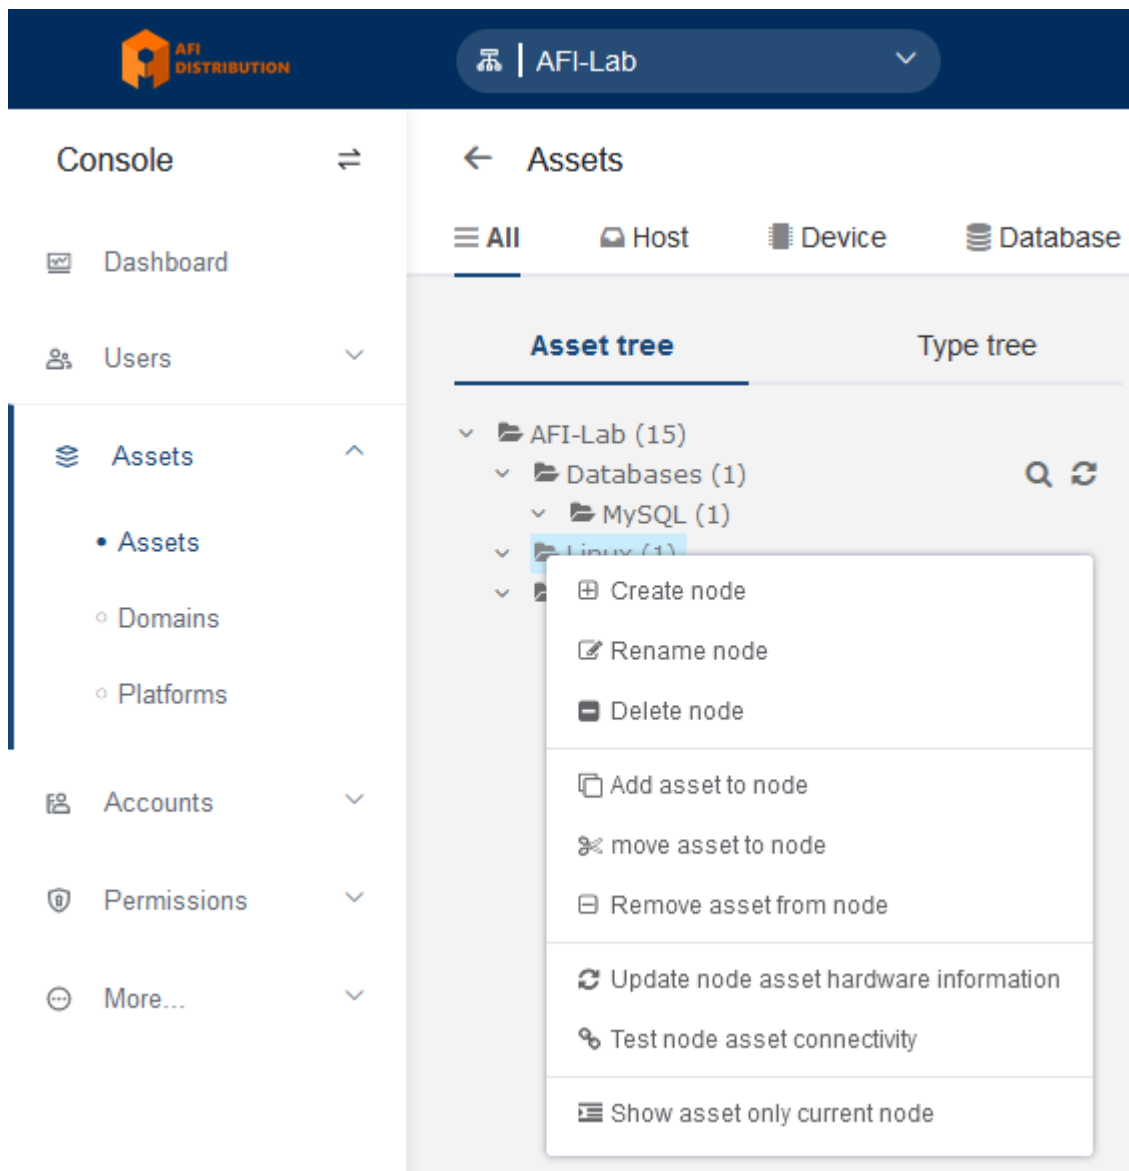

You can create folders (**Nodes**) and subfolders for your devices (use the **Create node** option). Devices can be sorted into these folders.

- A device can belong to multiple folders simultaneously.
- These folders can be used to manage access policies, for example, granting access to all devices in a specific folder.

### 3. Adding Assets to the System

Add a Linux-based device. Windows, MySQL, and other devices are added similarly.

Click the **Create** button, select the device type **Linux** (under **Host**), and fill in the fields:

- **Name:** Any meaningful name
- **IP/Host:** The IP address or DNS name of the device
- **Platform:** Linux
- **Node:** Folder(s) where the device will be placed

Adjust port numbers if non-standard ports are used.

The screenshot shows the 'AFI Lab' console interface. The left sidebar contains a 'Console' menu with options: Dashboard, Users, Assets (selected), Accounts, Permissions, and More... The main content area is titled 'Basic' and contains the following fields:

- Name:** Lab\_Rabbit
- IP/Host:** 10.10.53.210
- Platform:** Linux
- Node:** /AFI-LabLinux

Below the 'Basic' section is the 'Protocol' section, which includes a table of protocols:

Protocols	Port	Settings	Remove	Add
ssh	22			
sftp	22			

Below the 'Protocol' section is the 'Account' section, which includes a table of accounts:

Account list	Name	Username	Privileged	Template add	Actions
No Data					

Below the 'Account' section is the 'Other' section, which includes a 'Domain' dropdown menu and a 'Label' dropdown menu.

## 4. Configuring Device Access Permissions

Go to **Console - Policies - Authorization** and click the **Create** button. Fill in the required access parameters:

The screenshot shows the 'AFI Demo' console interface. The left sidebar contains a 'Console' menu with options: Dashboard, USER (User, Groups, Roles), ASSETS (Assets, Zones, Platforms), ACCOUNTS (Accounts, Templates), AUTOMATIONS, POLICIES (Authorization selected), ACLS, OTHERS, and Tags. The main content area is titled 'Update the asset authorization rules' and contains the following sections:

- Basic:** Name: full access
- User:** Users: TST\_User(TST\_User), Administrator(admin), test-nlo(test-nlo), testnlo.s(testnlo.s); Groups: AD Group\_test
- Asset:** Assets: Select; Nodes: /AFI Demo
- Account:** Accounts: ☒ All existing accounts, ☐ Specified accounts, ☒ Virtual accounts; Virtual accounts: ☒ Manual account, ☒ Same account, ☐ Anonymous account
- Protocol:** Protocols: ☒ All protocol, ☐ Specific protocol

**Name:** A meaningful name for the access group

**Users:** The PAM user(s) who will gain access to the devices

**Groups:** User group(s) that will gain access

**Assets:** The device(s) to which access is granted

**Nodes:** Folder(s) containing the devices to which access is granted

**Account:**

- **All accounts:** Allow connections with any existing account for each device
- **Specified accounts:** Specify particular accounts for connection

- **Virtual accounts:** enable additional auth options
- **Manual account:** Allow manual login credentials without adding the account to the system
- **Same account:** Use the same account as the user's PAM login (LDAP authorization only)
- **Anonymous account:** Connect without credentials, typically for web interfaces where users input their login credentials manually

**Protocol:** Limit the protocol used for connections

**Actions:** Enable or disable file transfers, clipboard sharing, or session sharing permissions if supported by the connection type.

#### Actions

Actions

☒ All
 

☒ Connect ⓘ
 

☒ Transfer
 

☒ Upload ⓘ
 ☒ Download ⓘ
 ☒ Delete ⓘ

☒ Clipboard
 

☒ Copy ⓘ
 ☒ Paste ⓘ

☒ Share ⓘ

The effects of each permission vary, click the icon next to the permission to view.

You can enable or disable the policy and set its start and end time:

Other

Active ☒

Date start

Date expired

Comment

Click **Submit** to save the settings.

## 5. Connecting to Devices

Go to the Web Terminal by clicking the button in the top-right corner:



In the terminal, users see only the devices they are permitted to access. Click on the desired device in the list to select the account and connection type:

## Connect - MySQL afisql.afi.local

✕

MYSQL

Select account

user

Connect Method

🌐 Web

💻 Native

🪟 Applet

☒ Web CLI ☐ Web GUI

Advanced option

Remember selected

☐ Automatic Login next time (right click asset Connection to re-select)

Connect

Without additional configuration, you can connect via the web interface using **SSH**, **RDP**, and **SFTP**, as well as to **MySQL** via **Web CLI** or **Web GUI**. Other connection types, such as Kubernetes, web interfaces, RemoteApp applications, and databases using dedicated clients, will be covered in other articles.